



Facets


It's Your Light!

Facets

A trio of classic industrial designs, Facets brings retro flair to all types of indoor, outdoor, residential and commercial applications. Ceiling, pendant and wall mount configurations are highlighted by Facets' unique, textured finish, which is available in six shades plus black and white, with custom color matching on request.




F3000 Series

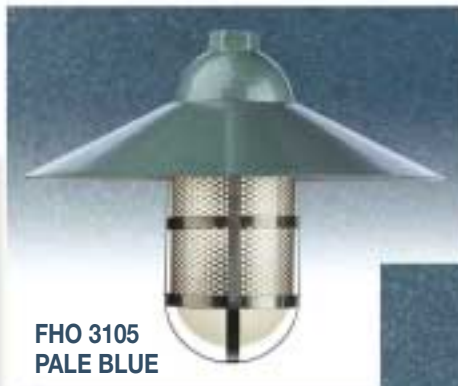

It's Your Light!

Select the details
that best suit
your application.

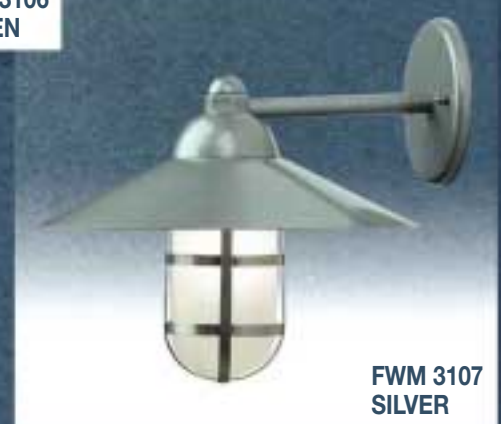

Configuration Codes

The cylindrical "bullet" diffuser is offered in choice of clear or satin-etched prismatic glass with an optional nickel-plated wire guard and perforated aluminum enhancement.

Lamping options for Facets include incandescent, line voltage halogen, compact fluorescent and metal halide. Constructed of heavy gauge spun aluminum and cast alloys, Facets models are available for dry, damp and wet locations.



01

02

03

04

05

06

07

F2000 Series



FPS 2204
PALE BLUE



FHO 2103
TAN



FPC 2107
BLUE



FWU 2106
GREEN



FCM 2202
PALE GREEN



FWM 2101
SILVER

Facets

A trio of classic industrial designs, Facets brings retro flair to all types of indoor, outdoor, residential and commercial applications. Ceiling, pendant and wall mount configurations are highlighted by Facets' unique, textured finish, which is available in six shades plus black and white, with custom color matching on request.



Blue

Pale Blue

Green

Pale Green

Tan

Silver

White

Black

F1000 Series



FPS 1102
PALE BLUE



FHO 1101
TAN



FPC 1103
BLUE



FWU 1107
GREEN



FWM 1104
SILVER




FCM 1206
PALE GREEN

Configuration Codes


The cylindrical "bullet" diffuser is offered in choice of clear or satin-etched prismatic glass with an optional nickel-plated wire guard and perforated aluminum enhancement.

Lamping options for Facets include incandescent, line voltage halogen, compact fluorescent and metal halide. Constructed of heavy gauge spun aluminum and cast alloys, Facets models are available for dry, damp and wet locations.

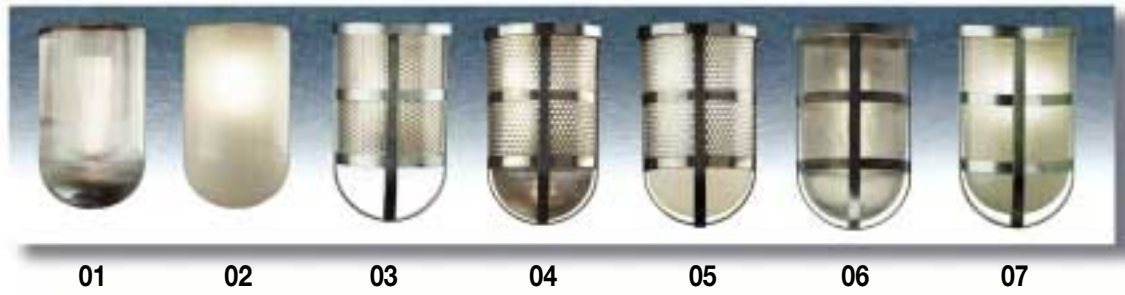

It's Your Light!


Dress it to suit your design criteria by selecting from Facet's seven available configurations and virtually limitless finish options. Dramatically reduce operating and maintenance expenses by selecting high-efficiency Compact Fluorescent (e/f) or Metal Halide (m) lamping.

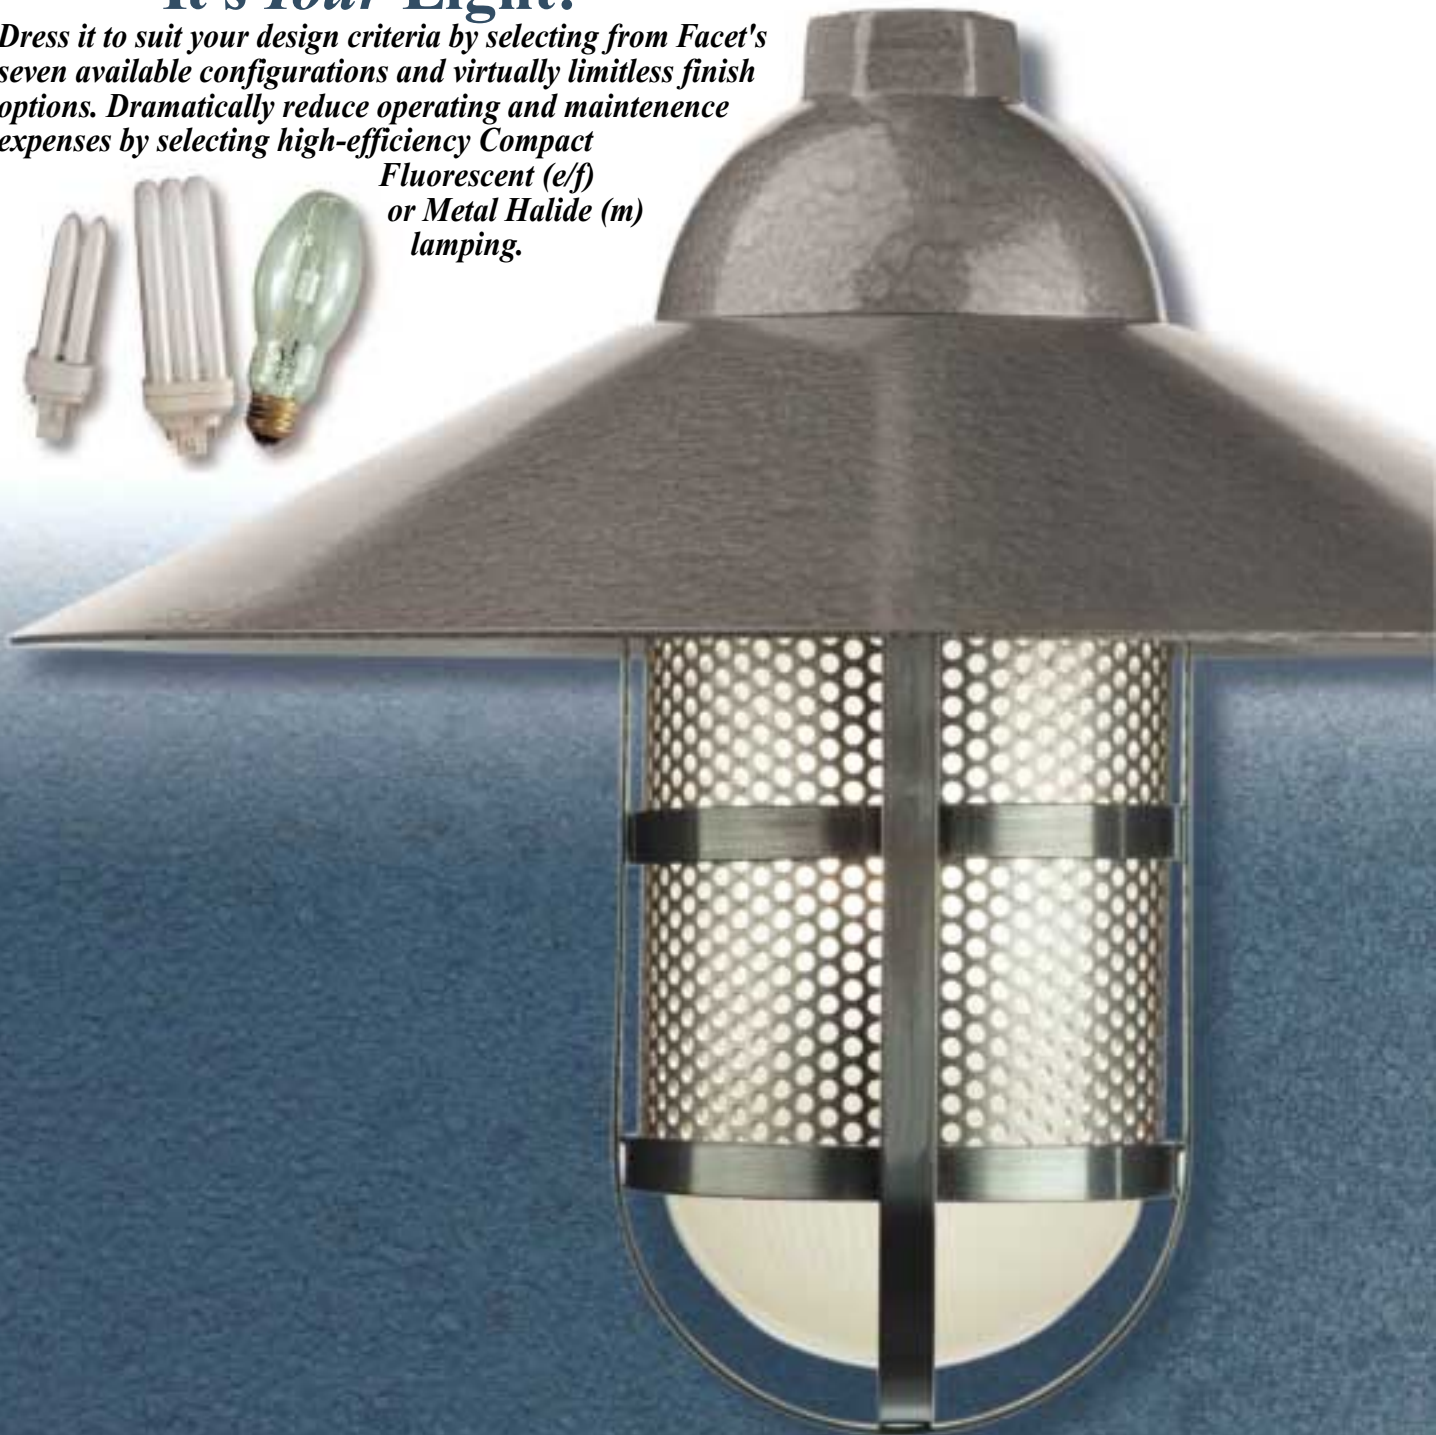










Configuration Codes

The cylindrical "bullet" diffuser is offered in choice of clear or satin-etched prismatic glass with an optional nickel-plated wire guard and perforated aluminum enhancement.

Lamping options for Facets include incandescent, line voltage halogen, compact fluorescent and metal halide. Constructed of heavy gauge spun aluminum and cast alloys, Facets models are available for dry, damp and wet locations.

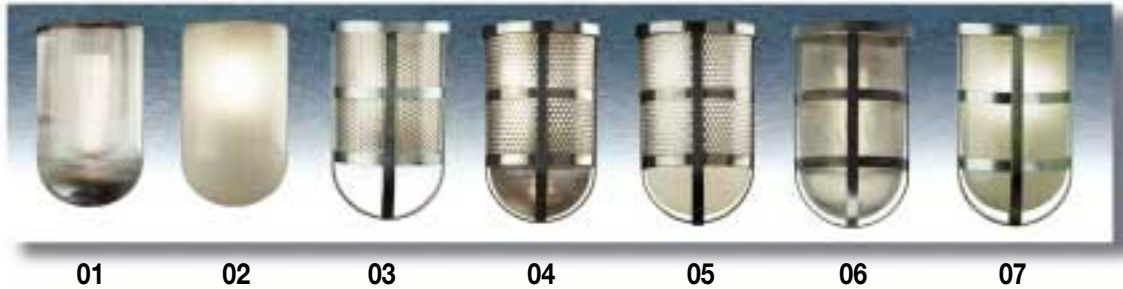

01 02 03 04 05 06 07

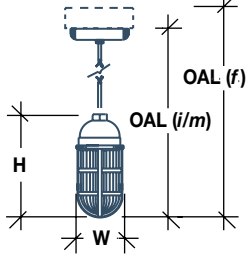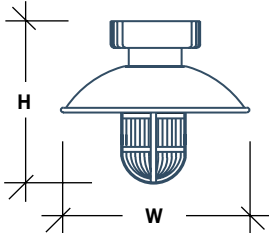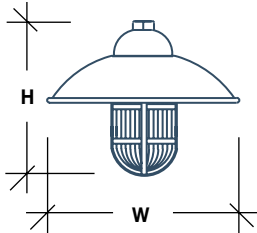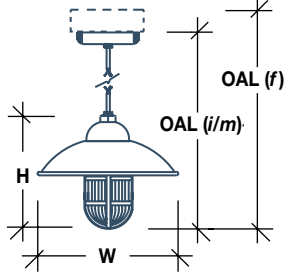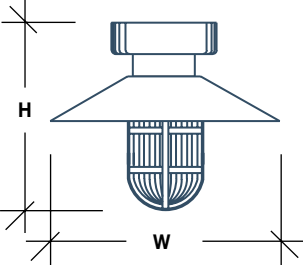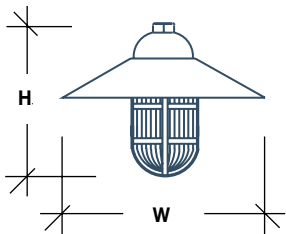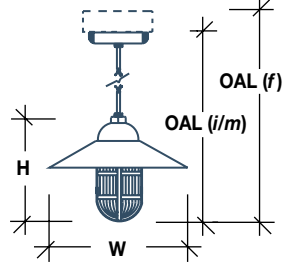FCM - Ceiling Mount	FHO - Accepts 1/2" Pipe (7/8" O.D.) (by others)	FPC - Cord-hung Pendant, 72" black cord (SJT) (Custom cord lengths are available.)																																						
 <table border="1" data-bbox="154 919 479 1008"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> </tr> </thead> <tbody> <tr> <td>FCM 1100</td> <td>9</td> <td>6</td> </tr> <tr> <td>FCM 1200</td> <td>10-3/4</td> <td>6</td> </tr> </tbody> </table>	Catalog #	H	W	FCM 1100	9	6	FCM 1200	10-3/4	6	 <table border="1" data-bbox="630 919 954 1008"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> </tr> </thead> <tbody> <tr> <td>FHO 1100</td> <td>9-1/4</td> <td>3-7/8</td> </tr> <tr> <td>FHO 1200</td> <td>10-3/4</td> <td>4-7/8</td> </tr> </tbody> </table>	Catalog #	H	W	FHO 1100	9-1/4	3-7/8	FHO 1200	10-3/4	4-7/8	 <table border="1" data-bbox="1096 919 1502 1066"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> <th>OAL</th> </tr> </thead> <tbody> <tr> <td>FPC 1100f</td> <td>9 1/4</td> <td>3-5/8</td> <td>84</td> </tr> <tr> <td>FPC 1100i/m</td> <td>9-1/4</td> <td>3-5/8</td> <td>82-1/4</td> </tr> <tr> <td>FPC 1200f</td> <td>10-3/4</td> <td>4-5/8</td> <td>85-1/2</td> </tr> <tr> <td>FPC 1200i/m</td> <td>10-3/4</td> <td>4-5/8</td> <td>83-3/4</td> </tr> </tbody> </table>	Catalog #	H	W	OAL	FPC 1100f	9 1/4	3-5/8	84	FPC 1100i/m	9-1/4	3-5/8	82-1/4	FPC 1200f	10-3/4	4-5/8	85-1/2	FPC 1200i/m	10-3/4	4-5/8	83-3/4
Catalog #	H	W																																						
FCM 1100	9	6																																						
FCM 1200	10-3/4	6																																						
Catalog #	H	W																																						
FHO 1100	9-1/4	3-7/8																																						
FHO 1200	10-3/4	4-7/8																																						
Catalog #	H	W	OAL																																					
FPC 1100f	9 1/4	3-5/8	84																																					
FPC 1100i/m	9-1/4	3-5/8	82-1/4																																					
FPC 1200f	10-3/4	4-5/8	85-1/2																																					
FPC 1200i/m	10-3/4	4-5/8	83-3/4																																					
 <table border="1" data-bbox="154 1386 479 1474"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> </tr> </thead> <tbody> <tr> <td>FCM 2100</td> <td>10-3/4</td> <td>11-1/2</td> </tr> <tr> <td>FCM 2200</td> <td>12-1/4</td> <td>14</td> </tr> </tbody> </table>	Catalog #	H	W	FCM 2100	10-3/4	11-1/2	FCM 2200	12-1/4	14	 <table border="1" data-bbox="630 1386 954 1474"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> </tr> </thead> <tbody> <tr> <td>FHO 2100</td> <td>9-1/4</td> <td>11-1/2</td> </tr> <tr> <td>FHO 2200</td> <td>11</td> <td>14</td> </tr> </tbody> </table>	Catalog #	H	W	FHO 2100	9-1/4	11-1/2	FHO 2200	11	14	 <table border="1" data-bbox="1096 1386 1502 1533"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> <th>OAL</th> </tr> </thead> <tbody> <tr> <td>FPC 2100f</td> <td>9 1/4</td> <td>11-1/2</td> <td>84</td> </tr> <tr> <td>FPC 2100i/m</td> <td>9-1/4</td> <td>11-1/2</td> <td>82-1/4</td> </tr> <tr> <td>FPC 2200f</td> <td>11</td> <td>14</td> <td>85-3/4</td> </tr> <tr> <td>FPC 2200i/m</td> <td>11</td> <td>14</td> <td>84</td> </tr> </tbody> </table>	Catalog #	H	W	OAL	FPC 2100f	9 1/4	11-1/2	84	FPC 2100i/m	9-1/4	11-1/2	82-1/4	FPC 2200f	11	14	85-3/4	FPC 2200i/m	11	14	84
Catalog #	H	W																																						
FCM 2100	10-3/4	11-1/2																																						
FCM 2200	12-1/4	14																																						
Catalog #	H	W																																						
FHO 2100	9-1/4	11-1/2																																						
FHO 2200	11	14																																						
Catalog #	H	W	OAL																																					
FPC 2100f	9 1/4	11-1/2	84																																					
FPC 2100i/m	9-1/4	11-1/2	82-1/4																																					
FPC 2200f	11	14	85-3/4																																					
FPC 2200i/m	11	14	84																																					
 <table border="1" data-bbox="154 1816 479 1904"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> </tr> </thead> <tbody> <tr> <td>FCM 3100</td> <td>10-1/2</td> <td>12</td> </tr> <tr> <td>FCM 3200</td> <td>12-1/4</td> <td>16</td> </tr> </tbody> </table>	Catalog #	H	W	FCM 3100	10-1/2	12	FCM 3200	12-1/4	16	 <table border="1" data-bbox="630 1816 954 1904"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> </tr> </thead> <tbody> <tr> <td>FHO 3100</td> <td>9-1/2</td> <td>12</td> </tr> <tr> <td>FHO 3200</td> <td>11-1/4</td> <td>16</td> </tr> </tbody> </table>	Catalog #	H	W	FHO 3100	9-1/2	12	FHO 3200	11-1/4	16	 <table border="1" data-bbox="1096 1816 1502 1963"> <thead> <tr> <th>Catalog #</th> <th>H</th> <th>W</th> <th>OAL</th> </tr> </thead> <tbody> <tr> <td>FPC 3100f</td> <td>9 1/2</td> <td>12</td> <td>84-1/4</td> </tr> <tr> <td>FPC 3100i/m</td> <td>9-1/2</td> <td>12</td> <td>82-1/2</td> </tr> <tr> <td>FPC 3200f</td> <td>11-1/4</td> <td>16</td> <td>86</td> </tr> <tr> <td>FPC 3200i/m</td> <td>11-1/4</td> <td>16</td> <td>84-1/4</td> </tr> </tbody> </table>	Catalog #	H	W	OAL	FPC 3100f	9 1/2	12	84-1/4	FPC 3100i/m	9-1/2	12	82-1/2	FPC 3200f	11-1/4	16	86	FPC 3200i/m	11-1/4	16	84-1/4
Catalog #	H	W																																						
FCM 3100	10-1/2	12																																						
FCM 3200	12-1/4	16																																						
Catalog #	H	W																																						
FHO 3100	9-1/2	12																																						
FHO 3200	11-1/4	16																																						
Catalog #	H	W	OAL																																					
FPC 3100f	9 1/2	12	84-1/4																																					
FPC 3100i/m	9-1/2	12	82-1/2																																					
FPC 3200f	11-1/4	16	86																																					
FPC 3200i/m	11-1/4	16	84-1/4																																					

Configuration Codes


The cylindrical "bullet" diffuser is offered in choice of clear or satin-etched prismatic glass with an optional nickel-plated wire guard and perforated



01 02 03 04 05 06 07


aluminum enhancement. Lamping options for Facets include incandescent, line voltage halogen, compact fluorescent and metal halide. Constructed of heavy gauge spun aluminum and cast alloys, Facets models are available for dry, damp and wet locations.

FPS - Stem-hung Pendant, 24" stem (7/8" O.D.)
(Custom stem lengths are available.)



Catalog #	H	W	OAL
FPS 1100e/f	9-1/4	3-5/8	36-3/4
FPS 1100i/m	9-1/4	3-5/8	35
FPS 1200e/f	10-3/4	4-5/8	38-1/4
FPS 1200i/m	10-3/4	4-5/8	36-1/2

FWM - Straight Arm Wall Mount.




Catalog #	H	W	E	M/C
FWM 1100e/f	11-3/4	6	7-1/8	3
FWM 1100i/m	11-1/2	5-1/2	5-7/8	2-3/4
FWM 1200e/f	13-1/4	6	8-5/8	3
FWM 1200i/m	13	5-1/2	7-3/8	2-3/4


FWU - U-Arm Wall Mount




Catalog #	H	W	E	M/C
FWU 1100	14-3/4	6	12-3/8	10-1/2
FWU 1200	18-1/2	6	13-7/8	11-1/2




Catalog #	H	W	OAL
FPS 2100e/f	9 1/4	11-1/2	36-3/4
FPS 2100i/m	9-1/4	11-1/2	35
FPS 2200e/f	11	14	38-1/2
FPS 2200i/m	11	14	36-3/4

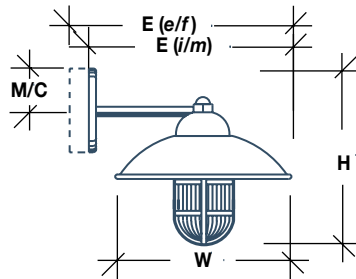


Catalog #	H	W	E	M/C
FWM 2100e/f	11-3/4	11-1/2	14-3/4	3
FWM 2100i/m	11-1/2	11-1/2	13-1/2	2-3/4
FWM 2200e/f	13-1/4	14	16-3/4	3
FWM 2200i/m	13	14	15-1/2	2-3/4




Catalog #	H	W	E	M/C
FWU 2100	14-3/4	11-1/2	16	10-1/2
FWU 2200	18-1/2	14	18-1/2	11-1/2



Catalog #	H	W	OAL
FPS 3100e/f	9 1/2	12	37
FPS 3100i/m	9-1/2	12	35-1/4
FPS 3200e/f	11-1/4	16	38-3/4
FPS 3200i/m	11-1/4	16	37

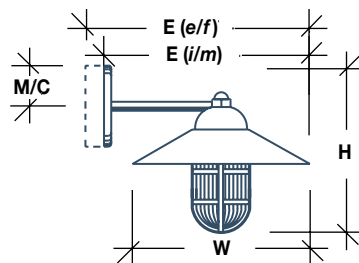

Catalog #	H	W	E	M/C
FWM 3100e/f	12	12	15	3
FWM 3100i/m	11-3/4	12	13-3/4	2-3/4
FWM 3200e/f	13-3/4	16	19	3
FWM 3200i/m	13-1/2	16	17-3/4	2-3/4



Catalog #	H	W	E	M/C
FWU 3100	15	12	16-1/4	10-1/2
FWU 3200	8-3/4	16	19-1/2	11-1/2

Facets

A trio of classic industrial designs, Facets brings retro flair to all types of indoor, outdoor, residential and commercial applications. Ceiling, pendant and wall mount configurations are highlighted by Facets' unique, textured finish, which is available in six shades plus black and white, with custom color matching on request.



Facets Specifications

APPLICATIONS: Commercial and residential interiors and exteriors.

CONSTRUCTION: Heavy wall aluminum and cast alloys, with spun aluminum reflectors, extruded stems and mounting arms. Cast canopies furnished on wall mount models. Cord-hung models supplied pre-wired with 72-inch, black, three conductor 18-3 SJT and color-coordinated ceiling canopy; stem-hung models supplied with 24-inch, 7/8-inch O.D. (1/2 IPS) color-coordinated stem and heavy-duty, hang-straight (45-degree) steel swivel canopy.

DIFFUSER: Choice of clear or satin-etched prismatic cylindrical bullet-shaped glass, with neoprene gasket to seal and protect against dust, moisture and insects; heat quenched and shatter resistant on Metal Halide (**m**) models. Bare-lamp models also available (interior applications only).

ACCESSORIES: Clamp on wire guard is fabricated from heavy-gauge steel strapping and brushed-nickel plated, providing aesthetic value as well as protection to the lamp chamber. Decorative perforated enhancement formed from aluminum sheet with 1/8-inch diameter holes on 3/16-inch staggered center, providing 40 percent open area.

LAMPING: Choice of Incandescent (**i**), with optional Halogen (120-volt, medium-base) lamp, Compact Fluorescent (**f/e**) or Metal Halide (**m**). Consult Ordering Guide for per-fixture wattage and lamp types.

BALLAST: Fluorescent (**f**): Normal Power Factor magnetic 120-volt (60Hz), housed in fixture canopy.
Electronic (**e**): High Power Factor (>.97), universal voltage (120-277), with smart circuitry that senses lamp wattage and supply voltage (50/60 Hz), and protects lamp and ballast at the end of lamp life. Specification-grade features include true 0-degree start (-18 degrees C.), >.98 Ballast factor, <3% flicker and <10% Total Harmonic Distortion (THD). Ballast is housed in fixture canopy. For dimmable electronic models, please consult factory.

Metal Halide (**m**): High Power Factor, dual voltage (120 or 277) 60 Hz, high reactance autotransformer, indoor/outdoor type 1, F-can style. Starting temperature rated at -20 degrees F. Remote mounting required: Maximum 20 feet lamp to ballast. Weather-tight enclosure (not provided) required for installation in wet locations.

SOCKET: Incandescent - Medium-base porcelain with nickel-plated screw shell and center contact.

Compact Fluorescent - Heat-resistant thermoplastic with lamp retention clips, providing for secure lamp fit and easy push-pull re-lamping.

Metal halide - 4KV pulse-rated medium base porcelain with brass-nickel plated screw shell and center contact reinforced with corrosion-resistant leaf spring.

MOUNTING: Ceiling, Pendant (cord or stem) and Wall-mount fixtures are designed for attachment to a recessed four-inch outlet box.

FASTENERS: Stainless steel, brass and aluminum.

FINISHES: Metal parts are chemically cleaned and pre-treated with chromate or iron phosphate primer prior to application of finish coat. Thermosetting polyester (TGIC) powder coating is provided on smooth finishes. Faceted finishes are provided with industrial grade exterior (liquid) enamel. Non-faceted liquid-finish custom color matching available with submittal of sample chip.


COMPLIANCES: U.L. listed.

Specifications within this brochure are subject to change without notice.


Configuration Codes

The cylindrical "bullet" diffuser is offered in choice of clear or satin-etched prismatic glass with an optional nickel-plated wire guard and perforated aluminum enhancement.

Lamping options for Facets include incandescent, line voltage halogen, compact fluorescent and metal halide. Constructed of heavy gauge spun aluminum and cast alloys, Facets models are available for dry, damp and wet locations.

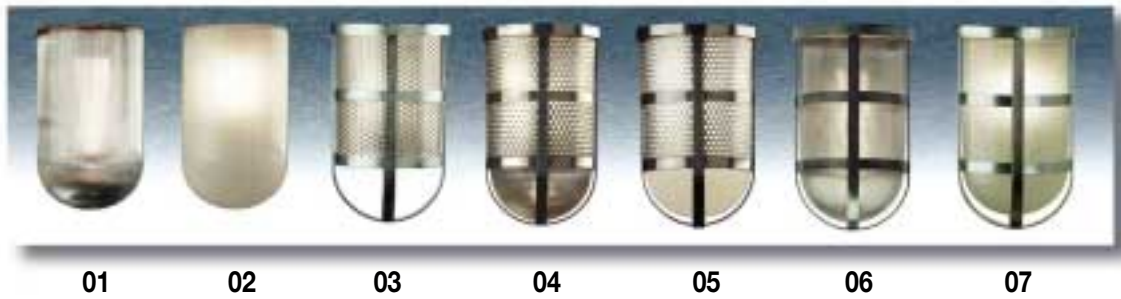

Facets Ordering Guide

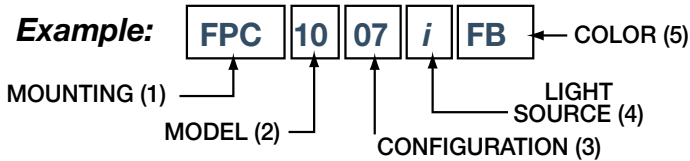

(1) MOUNTING

FCM - Ceiling Mount	10, 20 or 30
FHO - Head-only (accepts 1/2 pipe)	10, 20 or 30
FPC - Cord-hung Pendant	10, 20 or 30
FPS - Stem-hung Pendant	10, 20 or 30
FWM - Wall Mount (straight arm)	10, 20 or 30
FWU - Wall Mount (U-arm)	10, 20 or 30

(2) MODEL

(3) CONFIGURATION

- 01 - Clear Prismatic Glass Cylinder
- 02 - Satin-Etched Prismatic Glass Cylinder
- 03 - Bare Lamp with Wire Guard and Perforated Aluminum Enhancement
- 04 - Clear Prismatic Glass Cylinder with Wire Guard and Perforated Aluminum Enhancement
- 05 - Satin-Etched Prismatic Glass Cylinder with Wire Guard and Perforated Aluminum Enhancement
- 06 - Clear Prismatic Glass Cylinder with Wire Guard
- 07 - Satin-Etched Prismatic Glass Cylinder with Wire Guard

(4) LIGHT SOURCE

i - Accepts incandescent A lamp (medium base) 100 Watt maximum (F1100, F2100, F3100) or 200 Watt maximum (F1200, F2200, F3200).

f13 - Includes 13 Watt compact fluorescent double twin tube lamp (GX23-2 base). Supplied with 120-volt Normal Power Factor magnetic ballast.

e26, e32, e42 - Includes 26, 32 or 42 Watt compact fluorescent triple twin tube lamp (G24qx 4-pin Base). Supplied with universal voltage (120 - 277) High Power Factor electronic ballast.
 NOT available on Cord-Hung Pendant (FPC) models.
 For dimmable electronic models - please consult the factory.

m50, m70, m100 - Includes 50, 70, or 100 Watt metal halide lamp (medium base). Supplied with dual voltage (120-277) High Power Factor ballast - **Remote mounting required** - 20 ft. maximum lamp to ballast.
 Not available on "bare lamp" models.

(5) COLOR SELECTION

Smooth Finishes

White (**WH**)
 Black (**BL**)

Blue (**FB**)
 Green (**FG**)

Faceted Finishes

Pale Blue (**FPB**)
 Pale Green (**FPG**)

Silver (**FS**)
 Tan (**FT**)


LAMPS

A/HAL (medium base) 120-volt halogen lamp available (to be ordered separately) for use with (*i*) models. Specify lamp **A/HAL60, A/HAL75** or **A/HAL100** when ordering.

Includes lamp **DTT13**.

Includes lamp **TTT26 (e26), TTT32 (e32)** or **TTT42 (e42)**.

Includes lamp **M50**, (F1100, F2100, F3100 models), **M70** or **M100** (F1200, F2200, F3200 models).

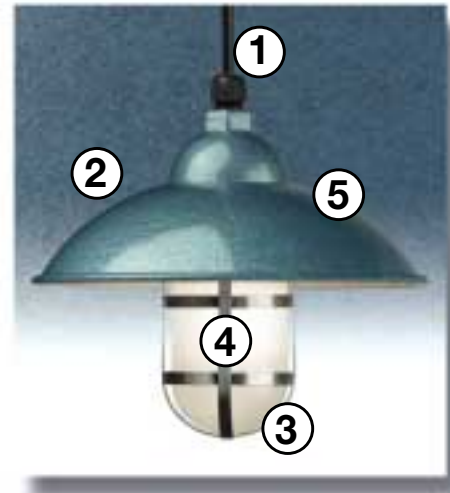



"The creation of Facets allowed us to re-think the types of finishes that are traditionally used in the design of retro-industrial lighting. Our unique chemical coating simulates the galvanized finish often seen in these types of fixtures, providing a rich, dimensional look with expanded color options plus all the benefits of aluminum construction. The optional nickel-plated wire guard also represents an upgrade over traditional offerings. We used flat stock in place of standard rounded wire in order to create a more substantial design."

The Luraline Design Team

Facets

Designer Series by

LURALINE