

Helos



Helos



Versatile Appeal for a Range of Applications



A versatile design with broad appeal for a range of applications has made **Helos** one of Luraline's most popular series of lighting fixtures. Its classic look complements the decor of both exterior and interior installations for commercial, hospitality, contract and more. Helos is offered in pendant, wall and post-mount configurations, with incandescent, compact fluorescent, high pressure sodium or metal halide lamping and choice of 13 smooth, metallic and textured finishes.

About Luraline ...

Since 1967, Luraline Products Company has built a reputation as a manufacturer of quality lighting fixtures. We own and operate our 30,000-square-foot manufacturing facility and headquarters in South Florida.

We pride ourselves on our outstanding customer service and extraordinary attention to detail. Regardless of the size or scope of the project, you can depend on Luraline for all your lighting requirements.

Our Products ...

Our extensive catalog features interior and exterior lighting fixtures in pendant, ceiling, sconce, wall and post-mount configurations. We offer a full range of energy-saving options utilizing the latest technology in high-efficiency light sources, including compact fluorescent and H.I.D.

Luraline lighting fixtures are designed to fulfill a range of commercial applications, including, but not limited to, hospitality, restaurant, retail, entertainment, contract, educational, institutional, healthcare and multi-family and/or assisted living facilities. Fixtures are presented in coordinated groupings that ensure an attractive and cohesive lighting design for any installation.

In addition, Luraline also offers full custom design capabilities, with a CAD department that is available to produce fixtures of metal, plastic or wood construction, made to your specifications.

Our Website ...

Visit www.luraline.com to browse our full catalog, search for products, and submit Requests for Quote (RFQ).

Our website also features online Specification Submittal Sheets. To access this valuable tool, first perform a Search. Then, click on a chosen fixture to be taken to the products page, where you can view and select among the available options for that item. After you have specified the details for your chosen fixture, enter the job name and fixture type onto the form. At the bottom of the form, choose Print Submittal Sheet. This results in a quality drawing, custom-tailored to the options and job that you have selected.



The **Helos Series** of European style cord-hung pendant fixtures is constructed of aluminum with bullet-shaped prismatic glass diffuser in choice of Clear (**CPR**) or Satin-Etched (**SE**). 36" white cord is provided. Please specify black cord if desired. Custom cord lengths also available. Standard finish is White (**WH**). For alternate finishes, see color chart below:

HL301 CORD

10" Dia, 9-1/2" H, 47" OAL

Incandescent lamping: Accepts one 100W Maximum A19 or A/HAL lamp.

Fluorescent lamping: (-**13Q/O**) includes one 13W or 22W (-**22Q/O**) CF lamp with 120 Volt/NPF magnetic ballast, housed in secondary canopy (adds 1-3/4" to OAL). For 13W HPF, add suffix **H** for 120 Volt (-**13QH/O**) or **I277** for 277 Volt (-**13Q/277/O**) adds 2-1/4" to OAL.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: **HL301 CORD CPR WH** (Incandescent - no Light Source code required)



HL302 CORD

14" Dia, 9-1/2" H, 47" OAL

Incandescent lamping: Accepts one 100W Maximum A19 or A/HAL lamp.

Fluorescent lamping: (-**13Q/O**) includes one 13W or 22W (-**22Q/O**) CF lamp with 120 Volt/NPF magnetic ballast, housed in secondary canopy (adds 1-3/4" to OAL). For 13W HPF, add suffix **H** for 120 Volt (-**13QH/O**) or **I277** for 277 Volt (-**13Q/277/O**) adds 2-1/4" to OAL.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: **HL302 CORD SE COP -13QH/O**



HELOS FINISHES

Helos is offered in a full palette of smooth, textured, antique and metallic finishes, as well as custom colors on request.

The **Helos Series** of European style stem-hung pendant fixtures is constructed of aluminum with bullet-shaped prismatic glass diffuser in choice of Clear (**CPR**) or Satin-Etched (**SE**). 11/16" O.D. x 12" long stem and hang-straight canopy is provided. Custom stem lengths also available. Standard finish is White (**WH**). For alternate finishes, see color chart on page 1.



HL301 STEM

10" Dia, 9-1/2" H, 23-1/2" OAL



Incandescent lampping: Accepts one 100W Maximum A19 or A/HAL lamp.
 Fluorescent lampping*: (-13Q/O) includes one 13W or 22W (-22Q/O) CF lamp with 120 Volt/NPF magnetic ballast, housed in secondary canopy (adds 1-3/4" to OAL).
 For 13W HPF, add suffix **H** for 120 Volt (-13QH) or /277 for 277 Volt (-13Q/277/O) - adds 2-1/4" to OAL.
 For electronic 120 thru 277 Volt ballast, add suffix **E** (-13QE/O) - adds 1-3/4" to OAL. Also available with one 18W, 26W, 32W or 42W lamp (-18QE/O, -26TE/O, -32TE/O, -42TE/O).
 H.I.D. lampping: Includes one 50W medium-base High Pressure Sodium (-H50/O, -H50/R) or Metal Halide (-M50/O, -M50/R) lamp with dual-tap 120/277 Volt/HPF magnetic ballast, either remote-mounted (/R) or housed in secondary canopy (/O) - adds 4" to OAL.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: HL301 STEM CPR FS -26TE/O

HL302 STEM

14" Dia, 9-1/2" H, 23-1/2" OAL



HL301XL STEM

18" Dia, 12" H, 26" OAL



Incandescent lampping: Accepts one 200W Maximum A23 lamp.
 Fluorescent lampping*: (-26QE/O) includes one 26W CF lamp with electronic 120 thru 277 Volt ballast, housed in secondary canopy (adds 1-3/4" to OAL). Also available with one 32W, 42W or 57W CF lamp (-32TE/O, -42TE/O, -57TE/O) or two 26W lamps (-226QE/O).
 H.I.D. lampping: Includes ones 50W, 70W, 100W or 150W medium-base High Pressure Sodium (-H50/O, -H50/R, -H70/O, -H70/R, -H100/O, -H100/R, -H150/R) or Metal Halide (-M50/O, -M50/R, -M70/O, -M70/R, -M100/O, -M100/R, -M150/R) lamp with dual-tap 120/277 Volt/HPF magnetic ballast, either remote-mounted (/R) or housed in secondary canopy (/O) adds 4" to OAL.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: HL302XL STEM CPR FS -M100/O

HL302XL STEM

22" Dia, 15-1/2" H, 29-1/2" OAL

* Please consult factory for **dimmbable** fluorescent models.

The **Helos Series** of European style ceiling and wall mount fixtures is constructed of aluminum with bullet-shaped prismatic glass diffuser in choice of Clear (**CPR**) or Satin-Etched (**SE**). Standard finish is White (**WH**). For alternate finishes, see color chart on page 1.

Incandescent lampping: Accepts one 100W Maximum A19 or A/HAL lamp.
 Fluorescent lampping*: (-13Q/O) includes one 13W or 22W (-22Q/O) CF lamp with 120 Volt/NPF magnetic ballast, housed in secondary canopy (adds 1-3/4" to H). For electronic 120 thru 277 Volt ballast, add suffix **E** (-13QE/O) - adds 1-3/4" to H. Also available with one 18W, 26W or 32W lamp (-18QE/O, -26TE/O, -32TE/O).

H.I.D. lampping: Includes one 50W medium-base High Pressure Sodium (**H50/R**) or Metal Halide (**M50/R**) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering. Example: **HL333 CPR FS** (Incandescent - no Light Source code required)



HL333
10" Dia, 7-1/2" H

Incandescent lampping: Accepts one 200W Maximum A23 lamp.
 Fluorescent lampping*: (-28Q) includes one 28W CF lamp with 120V/NPF magnetic ballast or one 26W (-26QE) CF lamp with electronic 120 thru 277 Volt ballast. Also available with one 32W, 42W or 57W CF lamp (-32TE, -42TE, -57TE) or two 26W lamps (-226QE).

H.I.D. lampping: Includes one 50W, 70W or 100W medium-base High Pressure Sodium (-H50/R, -H70/R, -H100/R) or Metal Halide (-M50/R, -M70/R, -M100/R) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering. Example: **HL333XL SE WH -M50/R**



HL333XL
18" Dia, 11-1/4" H

Incandescent lampping: Accepts one 100W Maximum A19 or A/HAL lamp.
 Fluorescent lampping*: (-13Q) includes one 13W or 22W (-22Q) CF lamp with 120 Volt/NPF magnetic ballast. For electronic 120 thru 277 Volt ballast, housed in secondary canopy (adds 2" to E dimension), add suffix **E** (-13QE/O). Also available with one 18W, 26W, 32W or 42W lamp (-18QE/O, -26TE/O, -32TE/O, -42TE/O).

H.I.D. lampping: Includes one 50W medium-base High Pressure Sodium (**H50/R**) or Metal Halide (**M50/R**) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering. Example: **HL335 CPR WH -22Q**



HL335
5-1/4" W, 10" H, 7" E, 6-1/4" Mtg.Ctr.

Incandescent lampping*: Accepts two 100W Maximum A19 or A/HAL lamps.
 Fluorescent lampping*: (-213Q) includes two 13W CF lamps with 120 Volt/NPF magnetic ballasts. For electronic 120 thru 277 Volt ballast, add suffix **E** (-213QE). Also available with two 18W, 26W or 32W lamps (-218QE, -226TE, -232TE).

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering. Example: **HL317 SE FS -218QE**

Note: Optional rain deflector required on upper diffuser for outdoor applications. Please add suffix **"RD"** to catalog number to order.



HL317
18" W, 21" H, 12-3/4" E, 10-1/2" Mtg.Ctr.

* Please consult factory for **dimmbale** fluorescent models.

The **Helos Series** of European style wall-mount fixtures is constructed of aluminum with bullet-shaped prismatic glass diffuser in choice of Clear (**CPR**) or Satin-Etched (**SE**). Standard finish is White (**WH**). For alternate finishes, see color chart on page 1.



HL301 LWM

10" W, 16-1/2" H, 19" E, 2-3/4" Mtg. Ctr.

Incandescent lamping: Accepts one 100W Maximum A19 lamp.
 Fluorescent lamping*: (-13Q/O) includes one 13W CF lamp with 120 Volt/NPF magnetic ballast, housed in oversized canopy (adds 2" to E dimension). For electronic 120 thru 277 Volt ballast, add suffix **E** (-13QE/O) - adds 2" to E dimension.
 Also available with one 18W, 26W, 32W or 42W lamp (-18QE/O, -26TE/O, -32TE/O, -42TE/O).

H.I.D. lamping: Includes one 50W medium-base High Pressure Sodium (**H50/R**) or Metal Halide (**M50/R**) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: HL301 LWM SE RED -13QE/O

HL302 LWM

14" W, 16-1/2" H, 21" E, 2-3/4" Mtg.Ctr.



HL301XL LWM

18" W, 22-1/4" H, 31" E, 2-3/4" Mtg.Ctr.

Incandescent lamping: Accepts one 200W Maximum A23 lamp.
 Fluorescent lamping*: (-26QE/O) includes one 26W CF lamp with electronic 120 thru 277 Volt ballast, housed in secondary canopy (adds 2" to E dimension). Also available with one 32W, 42W or 57W CF lamp (-32TE/O, -42TE/O, -57TE/O) or two 26W lamps (-226QE/O).

H.I.D. lamping: Includes one 50W, 70W, 100W or 150W medium-base High Pressure Sodium (**-H50/R, -H70/R, -H100/R, -H150/R**) or Metal Halide (**-M50/R, -M70/R, -M100/R, -M150/R**) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: HL302XL LWM CPR COP -57TE/O

HL302XL LWM

22" W, 23-3/4" H, 33" E, 2-3/4" Mtg.Ctr.

* Please consult factory for **dimmmable** fluorescent models.

The **Helos Series** of European style wall-mount fixtures is constructed of aluminum with bullet-shaped prismatic glass diffuser in choice of Clear (**CPR**) or Satin-Etched (**SE**). Standard finish is White (**WH**). For alternate finishes, see color chart on page 1.

HL301 UWM

10" W, 19" H, 19" E, 14-1/4" Mtg.Ctr.

Incandescent lamping: Accepts one 100W Maximum A19 or A/HAL lamp.

Fluorescent lamping*: (-**13Q/O**) includes one 13W CF lamp with 120 Volt/NPF magnetic ballast, housed in oversized canopy (adds 2" to E dimension).

For electronic 120 thru 277 Volt ballast, add suffix **E** (-**13QE/O**) - adds 2" to E dimension. Also available with one 18W, 26W, 32W or 42W lamp (-**18QE/O**, -**26TE/O**, -**32TE/O**, -**42TE/O**).

H.I.D. lamping: Includes one 50W medium-base High Pressure Sodium (-**H50/R**) or Metal Halide (-**M50/R**) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: HL302 UWM CPR FS -26TE/O



HL302 UWM

14" W, 19" H, 21" E, 14-1/4" Mtg.Ctr.

HL301XL UWM

18" W, 30" H, 31" E, 22-3/4" Mtg.Ctr.

Incandescent lamping: Accepts one 200W Maximum A23 lamp.

Fluorescent lamping*: (-**26QE/O**) includes one 26W CF lamp with electronic 120 thru 277 Volt ballast, housed in secondary canopy (adds 2" to E dimension).

Also available with one 32W, 42W or 57W CF lamp (-**32TE/O**, -**42TE/O**, -**57TE/O**) or two 26W lamps (-**226QE/O**).

H.I.D. lamping: Includes one 50W, 70W, 100W or 150W medium-base High Pressure Sodium (-**H50/R**, -**H70/R**, -**H100/R**, -**H150/R**) or Metal Halide (-**M50/R**, -**M70/R**, -**M100/R**, -**M150/R**) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: HL302XL UWM CPR WH -M150/R



HL302XL UWM

22" W, 30" H, 33" E, 22-3/4" Mtg.Ctr.

* Please consult factory for **dimable** fluorescent models.

The **Helos Series** of European style wall-mount fixtures is constructed of aluminum with bullet-shaped prismatic glass diffuser in choice of Clear (**CPR**) or Satin-Etched (**SE**). Standard finish is White (**WH**). For alternate finishes, see color chart on page 1.



HL301 WM

10" W, 10" H, 16" E, 2-3/4" Mtg.Ctr.

Incandescent lamping: Accepts one 100W Maximum A19 or A/HAL lamp.

Fluorescent lamping*: (-13Q/O) includes one 13W CF lamp with 120 Volt/NPF magnetic ballast, housed in oversized canopy (adds 2" to E dimension).

For electronic 120 thru 277 Volt ballast, add suffix **E** (-13QE/O) (adds 2" to E dimension).

Also available with one 18W, 26W, 32W or 42W lamp (-18QE/O, -26TE/O, -32TE/O, -42TE/O).

H.I.D. lamping: Includes one 50W medium-base High Pressure Sodium (**H50/R**) or Metal Halide (**M50/R**) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: **HL301 WM CPR FS** (Incandescent - no Light Source code required)



HL302 WM

14" W, 10" H, 18" E, 2-3/4" Mtg.Ctr.



HL301XL WM

18" W, 14" H, 25" E, 4-1/2" Mtg.ctr.

Incandescent lamping: Accepts one 200W Maximum A23 lamp.

Fluorescent lamping*: (-26QE) includes one 26W CF lamp with electronic 120 thru 277 Volt ballast, housed in canopy (adds 2" to E dimension). Also available with one 32W, 42W or 57W CF lamp (-32TE, -42TE, -57TE) or two 26W lamps (-226QE).

H.I.D. lamping: Includes one 50W, 70W, 100W or 150W medium-base High Pressure Sodium (**-H50/R, -H70/R, -H100/R, -H150/R**) or Metal Halide (**-M50/R, -M70/R, -M100/R, -M150/R**) lamp with remote-mounted (**/R**) dual-tap 120/277 Volt/HPF magnetic ballast.

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: **HL302XL WM SE WH -M70/R**



HL302XL WM

22" W, 15-1/2" H, 28" E, 4-1/2" Mtg.Ctr.

* Please consult factory for **dimnable** fluorescent models.

The **Helos Series** of European style post-mount fixtures is constructed of aluminum with bullet-shaped prismatic glass diffuser in choice of Clear (**CPR**) or Satin-Etched (**SE**). Standard finish is White (**WH**). For alternate finishes, see color chart on page 1.

HL301 P

10" W, 19" H, 20" E

Slips 3" O.D. P or PX Series post - order separately - see page 9.

Incandescent lamping: Accepts one 100W Maximum A19 or A/HAL lamp.

Fluorescent lamping: (-**13Q/P**) includes one 13W or 22W (-**22Q/P**) CF lamp with 120 Volt/NPF magnetic ballast, housed in 3" O.D. post (minimum 2-3/4" I.D. required). For 13W HPF, add suffix **H** for 120 Volt (-**13QH/P**) or **/277** for 277 Volt (-**13Q/277/P**). For electronic 120 thru 277 Volt ballast, add suffix **E** (-**13QE/P**). Also available with one 18W, 26W, 32W or 42W lamp (-**18QE/P**, -**26TE/P**, -**32TE/P**, -**42TE/P**).

H.I.D. lamping: Includes one 50W medium-base lamp with magnetic ballast, housed in 3" O.D. post (minimum 2-3/4" I.D. required). (-**H50/P**) High Pressure Sodium (120 Volt/NPF only) or (-**M50/P**) Metal Halide (120 Volt/HPF). For 277 Volt/HPF, add suffix **/277** (-**M50/277/P**).

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: **HL302 P CPR FS-M50/P**



HL302 P

14" W, 19" H, 22" E

HL301XL PR/PRX

18" W, 30-1/2" H, 32-1/2" E

Slips 4" O.D. PR Series post - order separately - see page 9.

Incandescent lamping: Accepts one 200W Maximum A23 lamp.

Fluorescent lamping: (-**28Q/P**) includes one 28-W CF lamp with magnetic 120V/NPF ballast, housed in 4" O.D. post (minimum 3-3/4" I.D. required) or one 26W (-**26QE/P**) CF lamp with electronic 120 thru 277 Volt ballast. Also available with one 32W, 42W or 57W CF lamp (-**32TE/P**, -**42TE/P**, -**57TE/P**) or two 26W lamps (-**226QE/P**).


H.I.D. lamping: Includes one 50W, 70W or 100W medium-base lamp with magnetic ballast, housed in 4" O.D. post (3-3/4" minimum I.D. required). (-**H50/P**, -**H70/P**, -**H100/P**) High Pressure Sodium (120 Volt/NPF only) or (-**M50/P**, -**M70/P**, -**M100/P**) Metal Halide (120 Volt/HPF). For 277 Volt/HPF, add suffix **/277** (-**M50/277/P**, -**M70/277/P**, -**M100/277/P**).

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering. Example: **HL301XL PR CPR COP-M100/P**

Slips 4-1/2" O.D. PRX Series post - order separately - see page 10.

H.I.D. lamping: Includes one 150W medium-base lamp with magnetic ballast, housed in 4-1/2" O.D. post (4-1/4" minimum I.D. required). (-**H150/P**) High Pressure Sodium (120 Volt/NPF only) or (-**M150/P**) Metal Halide (120 Volt/HPF). For 277 Volt/HPF, add suffix **/277** (-**M150/277/P**).

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering. Example: **HL301XL PRX CPR BL-M150/P**

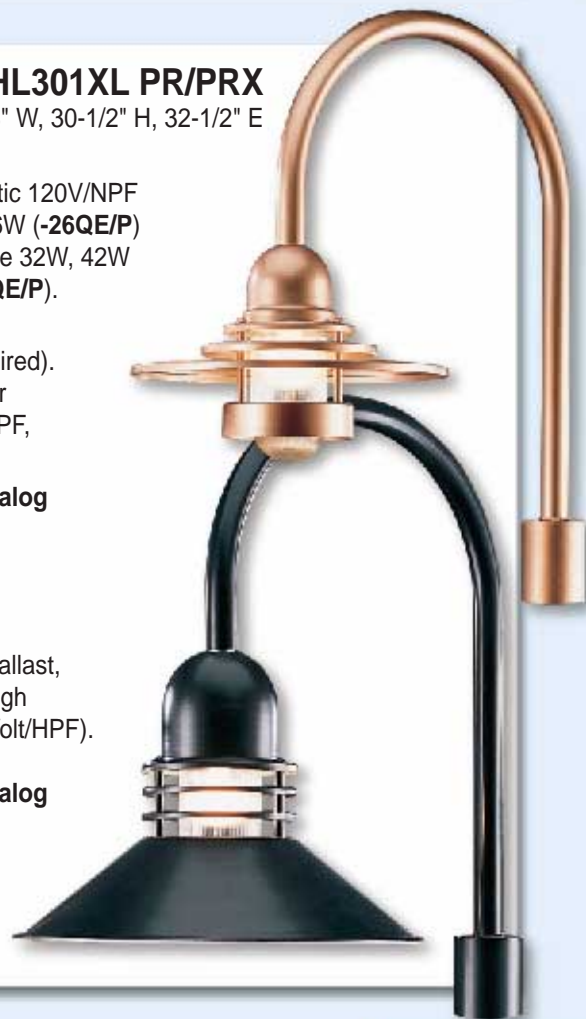

HL302XL PR/PRX

22" W, 30-1/2" H, 34-1/2" E

The **Helos Series** of European style post-mount fixtures is constructed of aluminum with bullet-shaped prismatic glass diffuser in choice of Clear (**CPR**) or Satin-Etched (**SE**). Standard finish is White (**WH**). For alternate finishes, see color chart on page 1.



HL301 P2 - 10" W, 19" H, 37" E

Slips 3" O.D. PX Series post - order separately - see page 9.

Incandescent lampping: Accepts two 100W Maximum A19 or A/HAL lamps.

Fluorescent lampping: (-213Q/P) includes two 13W or 22W (-222Q/P) CF lamps with 120 Volt/NPF magnetic ballasts, housed in 3" O.D. post (minimum 2-3/4" I.D. required). For 13W HPF, add suffix **H** for 120 Volt (-213QH/P) or **I277** for 277 Volt (-213Q/277/P). For electronic 120 thru 277 Volt ballast, add suffix **E** (-213QE/P). Also available with two 18W, 26W, 32W or 42W lamps (-218QE/P, -226TE/P, -232TE/P, -242TE/P).

H.I.D. lampping: Includes two 50W medium-base lamp with magnetic ballasts, housed in 3" O.D. post (minimum 2-3/4" I.D. required). (-2H50/P) High Pressure Sodium (120 Volt/NPF only) or (-2M50/P) Metal Halide (120 Volt/HPF).

For 277 Volt/HPF, add suffix **I277** (-2M50/277/P).

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering.

Example: HL302 P2 SE WH-242TE/P



HL302 P2 - 14" W, 19" H, 41" E



HL301XL PR2 / PRX2 - 18" W, 30-1/2" H, 61" E

Slips 4" O.D. PR Series post - order separately - see page 9.

Incandescent lampping: Accepts two 200W Maximum A23 lamps.

Fluorescent lampping: (-228Q/P) includes two 28W CF lamps with magnetic 120V/NPF ballasts, housed in 4" O.D. post (minimum 3-3/4" I.D. required) or two 26W (-226QE/P) CF lamps with electronic 120 thru 277 Volt ballast. Also available with two 32W, 42W or 57W CF lamps (-232TE/P, -242TE/P, -257TE/P) or four 26W lamps (-426QE/P).

H.I.D. lampping: Includes two 50W or 70W medium-base lamps with magnetic ballast, housed in 4" O.D. post (3-3/4" minimum I.D. required). (-2H50/P, -2H70/P)

High Pressure Sodium (120 Volt/NPF only) or (-2M50/P, -2M70/P) Metal Halide (120 Volt/HPF). For 277 Volt/HPF, add suffix **I277** (-2M50/277/P, -2M70/277/P).

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering. Example: HL301XL PR2 CPR WH-2M70/P



Slips 4-1/2" O.D. PRX Series post - order separately - see page 9.

H.I.D. lampping: Includes two 100W medium-base lamps with magnetic ballast, housed in 4-1/2" O.D. post (4-1/4" minimum I.D. required). (-2H100/P) High Pressure Sodium (120 Volt/NPF only) or (-2M100/P) Metal Halide (120 Volt/HPF). For 277 Volt/HPF, add suffix **I277** (-2M100/277/P).

Please ADD desired Diffuser, Finish and Light Source codes to catalog number when ordering. Example: HL302XL PRX2 CPR FS-2M100/P

HL302XL PR2 / PRX2 - 22" W, 30-1/2" H, 65-1/2" E

3", 4" & 4-1/2" DIAMETER ALUMINUM POSTS

Luraline manufactures its posts from high-strength extruded aluminum.
Standard Finish is Black (BL). For alternate finishes, please consult the factory.

PR/PRX

3" O.D. RESIDENTIAL-GRADE POSTS (no hand hole) - Aluminum with reinforced wall

- P6** 3" O.D. x 6 FT - Direct Burial - minimum 18" depth recommended
- PB6** Base Mounted - 4-3/4" bolt circle (lag shields and bolts supplied)
- PBC6** Base Mounted with Cover - 4-3/4" bolt circle (lag shields and bolts supplied)
- P8** 3" O.D. x 8 FT - Direct Burial - minimum 18" depth recommended
- PB8** Base Mounted - 6-3/8" bolt circle (1/2" x 10" anchor bolts supplied)
- PBC8** Base Mounted with Cover - 6-3/8" bolt circle (1/2" x 10" anchor bolts supplied)
- P10** 3" O.D. x 10 FT - Direct Burial - minimum 24" depth recommended
- P12** 3" O.D. x 12 FT - Direct Burial - minimum 36" depth recommended

3" O.D. ARCHITECTURAL-GRADE POSTS (with hand hole) - Aluminum with .125" wall

- PX8** 3" O.D. x 8 FT - Direct Burial - minimum 24" depth recommended
- PXB8** Base Mounted - 6-3/8" bolt circle (1/2" x 10" anchor bolts supplied)
- PXBC8** Base Mounted with Cover - 6-3/8" bolt circle (1/2" x 10" anchor bolts supplied)
- PX10** 3" O.D. x 10 FT - Direct Burial - minimum 24" depth recommended
- PXB10** Base Mounted - 7-3/8" bolt circle (1/2" x 10" anchor bolts supplied)
- PXBC10** Base Mounted with Cover - 7-3/8" bolt circle (1/2" x 10" anchor bolts supplied)
- PX12** 3" O.D. x 12 FT - Direct Burial - minimum 36" recommended

4" O.D. ARCHITECTURAL-GRADE POSTS (with hand hole) - Aluminum with .125" wall

- PR8** 4" O.D. x 8 FT - Direct Burial - minimum 24" depth recommended
- PRB8** Base Mounted - 7" bolt circle (3/4" x 15" anchor bolts supplied)
- PRBC8** Base Mounted with Cover - 7" bolt circle (3/4" x 15" anchor bolts supplied)
- PR10** 4" O.D. x 10 FT - Direct Burial - minimum 24" recommended
- PRB10** Base Mounted - 7" bolt circle (3/4" x 15" anchor bolts supplied)
- PRBC10** Base Mounted with Cover - 7" bolt circle (3/4" x 15" anchor bolts supplied)
- PRB12** 4" O.D. x 12 FT - Base Mounted - 7" bolt circle (3/4" x 15" anchor bolts supplied)
- PRBC12** Base Mounted with Cover - 7" bolt circle (3/4" x 15" anchor bolts supplied)
- PRB14** 4" O.D. x 14 FT - Base Mounted - 7" bolt circle (3/4" x 15" anchor bolts supplied)
- PRBC14** Base Mounted with Cover - 7" bolt circle (3/4" x 15" anchor bolts supplied)

4-1/2" O.D. ARCHITECTURAL-GRADE POSTS (with hand hole) - Aluminum with .125" wall

- PRXB10** 4-1/2" O.D. x 10 FT - Base Mounted - 7-1/2" bolt circle (3/4" x 15" anchor bolts supplied)
- PRXBC10** Base Mounted with Cover - 7-1/2" bolt circle (3/4" x 15" anchor bolts supplied)
- PRXB12** 4-1/2" O.D. x 12 FT - Base Mounted - 7-1/2" bolt circle (3/4" x 15" anchor bolts supplied)
- PRXBC12** Base Mounted with Cover - 7-1/2" bolt circle (3/4" x 15" anchor bolts supplied)
- PRXB14** 4-1/2" O.D. x 14 FT - Base Mounted - 7-1/2" bolt circle (3/4" x 15" anchor bolts supplied)
- PRXBC14** Base Mounted with Cover - 7-1/2" bolt circle (3/4" x 15" anchor bolts supplied)

P/PX



Helos

APPLICATIONS:

The Helos series is suitable for hospitality, retail and contract applications, and much more. Pendant, wall and post-mount fixtures are designed for installation in landscaping and on pathways and exterior facades, as well as in a range of interior spaces, from restaurants and boutiques to commercial settings.

CONSTRUCTION:

Heavy wall aluminum and cast alloys, with spun aluminum reflectors, extruded stems and mounting arms. Stem-hung models supplied with 11/16" outside diameter, 12" long color-coordinated stem and heavy-duty, hang-straight (45°) steel swivel canopy.

DIFFUSERS:

Choice of clear or satin-etched prismatic cylindrical bullet-shaped glass, gasketed to seal and protect against dust, moisture and insects; heat quenched and shatter resistant on H.I.D. models.

LAMPING:

Choice of Incandescent (available with optional 120 Volt, medium-base, halogen A-lamp), Compact Fluorescent, High Pressure Sodium or Metal Halide. See individual product specs for per-fixture wattage and lamp types.

LAMP HOLDERS:

Incandescent -Medium-base porcelain with nickel-plated screw shell and center contact.

Compact Fluorescent -Heat-resistant thermoplastic with lamp retention clips, providing for secure lamp fit and easy push-pull re-lamping.

H.I.D. (High Pressure Sodium/Metal Halide) -4KV pulse-rated medium-base porcelain with brass nickel-plated screw shell and center contact reinforced with corrosion-resistant leaf spring.

BALLASTS:

Compact Fluorescent -Electro-magnetic Normal Power Factor, 120-volt (60Hz) indoor/outdoor Type 1, rated for 32° F start or High Power Factor available in 120 or 277 Volts.

Electronic Compact Fluorescent -High Power Factor (>.97), electronic universal voltage (120-277), with smart circuitry that senses lamp wattage and supply voltage (50/60Hz), and protects lamp and ballast at the end of lamp life. Specification-grade features include true 0j start (-18° C), >.98 Ballast factor, <3% flicker and <10% Total Harmonic Distortion (THD). For dimmable electronic models, please consult factory.

H.I.D. - Electro-magnetic Normal Power Factor, 120 Volt (60Hz) indoor/outdoor Type 1 ballast, rated for -20° F start. See individual product specs for High Power Factor and 277 Volt offerings. Models with remote-mounted ballast supplied with High Power Factor dual-tap (120/277 Volt), high reactance transformer and have a maximum lamp-to-ballast distance of 10 feet on High Pressure Sodium models and 20 feet on Metal Halide models. Weather-tight enclosure (by others) required for installation in wet locations.

MOUNTING:

Pendant, surface and wall-mount fixtures designed for installation over recessed 4" outlet box.

Post-mount fixtures slip 3", 4" or 4-1/2" outside diameter posts, depending on model.

FINISHES:

A full palette of smooth, textured and metallic* finishes is offered. Metal parts are chemically cleaned and pre-treated with chromate or iron phosphate primer prior to application of thermosetting polyester (TGIC) powder coating. Copper finish is comprised of real metal flakes and industrial grade exterior liquid enamel. Non-standard, custom colors and color matching (with submission of color chip) are supplied with industrial-grade exterior enamel liquid coating, subject to surcharge and not returnable. Note: RAL colors may be special-ordered in TGIC powder.

*Optional clear topcoat is recommended to maintain appearance of metallic finishes in exterior applications. Add suffix "TC" to color selection when ordering.

COMPLIANCES:

All models are UL Listed or NRTL Certified.

Information contained within this brochure subject to change without prior notice.



LURALINE PRODUCTS CO. A Division of Exciting Products Manufacturing Corp.
Telephone: 305.685.6588 · 800.940.6588 · Facsimile: 305.685.6500